

Pavement Classification Rating for Runways 6/24 and 12/30

The logo for Iowa DOT, featuring the word "IOWA" in blue with a yellow sun icon over the "O", followed by a vertical bar and the word "DOT" in blue. The logo is enclosed in a green circular frame that is part of a larger green graphic element on the right side of the page.

IOWA | DOT

Fort Dodge Regional Airport

PREPARED BY

Applied Pavement Technology, Inc.
115 West Main Street, Suite 400
Urbana, Illinois 61801
(217) 398-3977
www.appliedpavement.com

JULY 2024

The logo for Applied Pavement Technology, consisting of a green circle with a white dot inside, and a green swoosh underneath.

applied pavement
TECHNOLOGY

The preparation of this document was financed in part through an Airport Improvement Program grant from the Federal Aviation Administration (Project Number 3-19-0000-031-2023) as provided under Section 505 of the Airport and Airway Improvement Act of 1982, as amended. The contents do not necessarily reflect the DOT's official views or the policy of the FAA. Acceptance of this report by the FAA does not in any way constitute a commitment on the part of the United States to participate in any development depicted therein nor does it indicate the proposed development is environmentally acceptable in accordance with appropriate public laws.

Introduction

As part of the update of the Iowa Airport Pavement Management System (APMS), Applied Pavement Technology, Inc. (APTech) determined the Pavement Classification Ratings (PCRs) for Runways 06/24 and 12/30 at Fort Dodge Regional Airport. In 2022, the Federal Aviation Administration (FAA) updated pavement strength reporting guidance to align with the International Civil Aviation Organization (ICAO). As part of that alignment process, reporting requirements are transitioning to PCRs from the previous reporting of Pavement Classification Numbers (PCNs) completed during the previous APMS updates. When compared to an aircraft's Aircraft Classification Rating (ACR), the PCR provides a measure of a pavement's relative strength for supporting the applied loads of the aircraft. The process for determining PCRs is outlined in the FAA Advisory Circular 150/5335-5D, *Standardized Method of Reporting Airport Pavement Strength – PCR* and the corresponding FAARFIELD software (FAA 2022). FAARFIELD version 2.1 was used for the analysis (FAA 2023a).

Critical inputs for determining PCRs include the pavement cross section data, subgrade strength, and forecasted aircraft traffic. The pavements' cross sections were obtained through a review of historical records stored in the PAVER database and documentation provided by Fort Dodge Regional Airport. The subgrade strength was provided by Fort Dodge Regional Airport. Required traffic data were derived by APTech from the FAA's Traffic Flow Management System Counts (TFMSC) obtained from the [FAA Operations and Performance Data](#) webpage. The overall operational volumes were obtained from Terminal Area Forecast data. These traffic data were then reviewed by the airport, after which, a 20-year traffic forecast was developed.

This report includes relevant information regarding the Pavement Condition Index (PCI) results, especially concerning load-related distress; an overview of the ACR-PCR system; required inputs for determining PCRs; and the PCR results for Runways 06/24 and 12/30 at Fort Dodge Regional Airport.

Pavement Condition Summary

APTech visually assessed the pavements at Fort Dodge Regional Airport in the fall of 2022 using the PCI procedure (APTech 2022). Detailed results of the condition assessment can be found in the Fort Dodge Regional Airport's individual APMS report or the web-based interactive APMS tool, IDEA (APTech 2023), available through a link on the [Iowa Department of Transportation, Modal Transportation Bureau – Aviation \(Iowa DOT\)](#) website.

Pavement condition data are not directly used in the structural analysis; however, the results should be considered when determining what PCR to publish. For example, a pavement exhibiting a significant amount of load-related distress provides a strong indication that the past traffic has exceeded the limits the structure can support. For asphalt-surfaced pavements, alligator cracking and rutting are considered load-related distresses. For portland cement concrete (PCC) pavements, corner breaks and longitudinal, transverse, and diagonal (LTD) cracking are considered load-related distresses.

For reference, table 1 summarizes the PCI, the percentage of the PCI deduct caused by load-related distress, and the specific load-related distress(es), if any, recorded during the most recent pavement inspection for Runways 06/24 and 12/30.

Table 1. 2022 PCI results.

Branch	Section	Surface Type	LCD	2022 PCI	Percent Deduct due to Load-Related Distress	Load-Related Distress Observed
R06FD	01	AAC	6/3/2015	78	0	None
R06FD	02	AAC	6/1/2012	78	22	Alligator Cracking
R12FD	01	APC	6/1/2012	72	0	None
R12FD	02	APC	6/1/2012	72	0	None
R12FD	03	PCC	5/1/2004	84	85	Corner Break, LTD Cracking, Shattered Slab
R12FD	04	PCC	5/1/2004	97	31	LTD Cracking

Table Notes:

1. See figure 3 in the Fort Dodge Regional Airport Pavement Management Report or refer to the interactive APMS tool for the location of the branch and section.
2. Surface Type: AC = asphalt cement concrete; AAC = asphalt overlay on AC; PCC = portland cement concrete; APC = asphalt overlay on PCC.
3. LCD = last construction date.
4. Distress types are defined by ASTM D5340-20 (ASTM 2020).

ACR-PCR Overview

ACR

According to FAA Advisory Circular 150/5335-5D (FAA 2022), the ACR is defined as a number that expresses the relative effect of an aircraft at a given weight on a pavement structure for a specified standard subgrade strength. The ACR can be calculated for any operating weight. Higher ACRs indicate an aircraft has a more severe effect on the pavement, while lower values indicate a less severe effect.

ACRs are reported by pavement type (rigid or flexible) and subgrade strength category (as defined later). Pavements with a PCC layer are generally considered rigid, including those with an asphalt overlay on PCC (APC). Stronger subgrade support conditions (e.g., granular subgrade soils with higher elastic modulus values [E]) correspond to lower ACRs as compared to weaker subgrade support conditions. The ACR has a minimum value of 0 and no upper limit.

ACRs are determined for the analyzed aircraft for flexible or rigid pavements and the applicable subgrade strength category using the FAA’s FAARFIELD software. The determined ACRs are for the specified aircraft weights. For a given aircraft, the ACRs will decrease as aircraft weight decreases. It is also worth noting that tire pressure influences ACRs. For example, given two aircraft with similar weights and gear configurations (for a specific pavement type and subgrade strength category), the aircraft with the lower tire pressure will have a lower ACR, indicating that its demand on a pavement is less than a similar aircraft with a higher tire pressure.

PCR

The PCR is assigned to a pavement and expresses the relative load-carrying capacity of that pavement in terms of allowable load for unrestricted operations based on the analyzed aircraft and pavement layer properties. The determined PCR is specific for the given conditions and should be recalculated if the aircraft types or volumes change significantly. As with the ACR, the PCR has a minimum value of 0 and has no upper limit. In addition to the numerical value, the PCR is reported with four codes, which represent the following categories:

- Pavement Type.
 - R = Rigid.
 - F = Flexible.
- Subgrade Strength Category.
 - A = High ($E \geq 21,756$ psi).
 - B = Medium ($14,504 \text{ psi} \leq E < 21,756$ psi).
 - C = Low ($8,702 \text{ psi} \leq E < 14,504$).
 - D = Ultra Low ($E \leq 8,702$ psi).
- Maximum Allowable Tire Pressure.
 - W = Unlimited (no pressure limit).
 - X = High (pressure limited to 254 psi).
 - Y = Medium (pressure limited to 181 psi).
 - Z = Low (pressure limited to 73 psi).
- Pavement Evaluation Method.
 - T = Technical Evaluation.
 - U = Using Aircraft Evaluation.

Note that the subgrade strength category is now based on the elastic modulus of the subgrade (rather than the California Bearing Ratio [CBR] and top-of-base k-value, as it was in the ACN-PCN system) and is now consistent for both flexible and rigid pavement types.

General Overload Guidance

For aircraft with an ACR that exceeds the recommended PCR, ICAO overload guidance can be referenced. Alternatively, the indicated aircraft may be able to safely use these facilities (following the ACR-PCR procedure) by operating at a reduced weight. If aircraft do not operate at their analyzed weights, then the PCR should be recalculated using the actual aircraft weights.

In general, aircraft with ACRs exceeding 10 percent of the reported PCR should be restricted to avoid potential damage to the pavement. It should be noted that this percentage increased from 5 to 10 percent for rigid pavement when compared to previous PCN guidance; it is unchanged for flexible pavement. Exceeding this recommendation may result in a reduced pavement life. Appendix C of FAA Advisory Circular 150/5335-5D (FAA 2022) presents the following guidance for pavement overloads (based on ICAO guidance):

- Occasional traffic by aircraft with an ACR not exceeding 10 percent above the reported PCR should not adversely affect the pavement (for flexible or rigid pavements).
- Annual overload traffic operations number should not exceed approximately 5 percent of the total annual aircraft traffic.
- Overloads should not normally be permitted on pavements already exhibiting signs of load-related distress, during periods of thaw following frost penetration, or when the strength of the pavement or its subgrade could be weakened by water.
- Airport owners should regularly inspect the pavement condition when overload operations are conducted. Periodically, the airport owner should review the criteria for overload operations. Excessive repetition of overloads can cause a significant reduction in pavement life or accelerate when a pavement will require major rehabilitation.

In general, pavement overloads are expected to decrease pavement life but do not often cause immediate or catastrophic failures unless they are excessive.

PCR Analysis Inputs

Traffic, pavement cross section (thickness and material type), and subgrade data are used directly in FAARFIELD to calculate PCRs. In simplified terms, FAARFIELD uses these inputs to determine the critical aircraft within a traffic mix and adjusts the annual departures of the critical aircraft to achieve a Cumulative Damage Factor (CDF) equal to the maximum CDF of the aircraft mix. The maximum allowable gross weight of the critical aircraft to achieve a CDF of 1.0 is then determined, and the ACR of the critical aircraft at the maximum allowable weight is computed. FAARFIELD iterates these steps for all aircraft in the mix and presents the maximum ACR from this process as the PCR. The PCR should be associated with a “regularly using” aircraft to represent the pavement section. The FAA does not specify the threshold of the annual departures considered regular use; engineering judgment should be applied for seasonal or occasional use aircraft. Engineering judgment is also required to avoid overreporting pavement strength.

Pavement Cross Section

Pavement cross section information (layer thicknesses) and material types were either obtained from historical construction records that were stored in the PAVER database or were provided by Fort Dodge Regional Airport. A summary of the relevant layer thickness information for the PCR analysis is presented in table 2.

Table 2. Pavement cross section used in the PCR analysis.

Branch	Section	Layer 1 Thickness, in	Layer 1 Material Type	Layer 2 Thickness, in	Layer 2 Material Type	Layer 3 Thickness, in	Layer 3 Material Type
R06FD	01	7.5	P-401	6	P-201	15	P-154
R06FD	02	6	P-401	6	P-201	15	P-154
R12FD	01	6	P-401	7	P-501	4	P-154
R12FD	02	6	P-401	7	P-501	4	P-154
R12FD	03	8	P-501	6	P-208	N/A	N/A
R12FD	04	8	P-501	6	P-208	N/A	N/A

Table Notes:

1. See figure 3 in the Fort Dodge Regional Airport Pavement Management Report or refer to the interactive APMS tool for the location of the branch and section.
2. Material Type: P-401 = asphalt concrete (flexible); P-501 = portland cement concrete (PCC, rigid); P-208 = aggregate base; P-201 = asphalt-treated base; P-154 = aggregate subbase.

Pavement and Subgrade Layer Inputs

FAARFIELD uses Layered Elastic Analysis (LEA) for modeling pavement structures for determining ACR and PCR. LEA is used as outlined in FAA Advisory Circular 150/5335-5D (FAA 2022). The updated analysis better aligns with the FAA’s current approach for airfield pavement design.

For the flexible pavements on Runway 06/24, a subgrade strength CBR of 8.9 percent was provided by Fort Dodge Regional Airport and was used during this PCR analysis. Additionally, default FAARFIELD layer moduli were used during the analysis to represent the strength of the pavement layers.

For the rigid pavements on Runway 12/30, a top-of-base k-value is no longer considered in the PCR determination as was previously used in the PCN procedure. The subgrade strength and individual base layers are input for the PCR analysis. The concrete flexural strength is also a direct input for the PCR analysis. A subgrade strength k-value of 157 psi/inch was provided by

Fort Dodge Regional Airport and was used during this PCR analysis. Conservative default values of 4,000 ksi for the PCC modulus and 650 psi for the flexural strength were used as FAARFIELD inputs.

In addition, the composite pavements on Runway 12/30 (where the PCC was overlaid with asphalt) were analyzed as rigid pavements in FAARFIELD due to the thickness ratio of the asphalt layer compared to the underlying PCC layer. A subgrade strength k-value of 157 psi/inch was provided by Fort Dodge Regional Airport and was used during this PCR analysis. Conservative default values of 4,000 ksi for the PCC modulus and 650 psi for the flexural strength were used as FAARFIELD inputs.

Traffic

The characterization of traffic is an important part of the structural analysis of airport pavement facilities with inputs specifically including aircraft types, annual departure volumes, and weights. FAA pavement evaluation and design procedures only use departure data for the analysis because they generally have heavier loads due to larger fuel weight. The entire aircraft traffic mix associated with each facility is entered directly into FAARFIELD.

The traffic details were compiled by APTech. Information on the traffic mix, distribution, and future projections were determined using the FAA’s TFMSC Instrument Flight Rules (IFR) flight data records (FAA 2023b). The results were provided to Fort Dodge Regional Airport staff members for review and comment, and adjustments were made at their request. This traffic represents an estimate of the projected 20-year average annual departures based on the traffic currently using the airport. This information is presented in table 3 along with the corresponding ACRs (as determined using FAARFIELD) for flexible and rigid pavement and the corresponding subgrade strength category.

Because PCR calculations are dependent on the aircraft using a facility, PCRs should be recalculated if the aircraft types, weights, or volumes change significantly. Additionally, inaccurate traffic can cause the PCR to be overestimated or underestimated.

Table 3. Traffic data.

Representative Aircraft	Weight, lbs	Gear Type	Tire Pressure, psi	20-year Average Annual Departures for Runway 06-24	20-year Average Annual Departures for Runway 12-30	ACR for Rigid Pavement, Subgrade Category C	ACR for Flexible Pavement, Subgrade Category C
Socata TBM-7	6,579	S	66	1,450	967	16	22
Pilatus PC-12	10,450	S	98	905	603	33	40
Cessna Excel/XLS	20,200	S	70	340	227	56	70
Learjet 75	21,500	D	201	49	32	67	57
Bombardier Challenger 300	38,850	D	208	27	18	128	114
Bombardier CRJ-200	53,250	D	179	616	10	164	139
Gulfstream V/G500	90,900	D	188	8	0	N/A	296
Boeing 737-800	174,700	D	204	4	0	N/A	448
Boeing Globemaster 3	585,000	2T	138	2	0	N/A	550

Table Notes:

1. Configuration of the main gear: S = single, 2S = single in tandem, D = dual, 2D = two duals in tandem, 3D = three duals in tandem, and 2T = two triples in tandem, as defined in FAA Order 5300.7, *Standard Naming Convention for Aircraft Landing Gear Configurations* (FAA 2005).

PCR Results

The ACR–PCR procedure is structured such that a pavement with a given PCR can support an aircraft that has an ACR equal to or less than the PCR. Likewise, the pavement cannot, according to the procedure, accept frequent loadings from an aircraft with an ACR exceeding the PCR. For evaluating the structural capacity of a pavement section, it can be misleading to only look at the PCR as the determination of whether the pavement is acceptable must also consider the traffic using that pavement. Another way of evaluating a given section is through the ACR/PCR ratio (with ACR representing the maximum ACR of the aircraft in the traffic mix), where a ratio less than one indicates that the aircraft in the analyzed traffic mix can use the pavement without restrictions.

The resulting PCRs based on the analyses performed using FAARFIELD, allowable gross loads for common gear configurations, and the ACR/PCR ratios are summarized in table 4. The corresponding gross load correlations were determined using FAARFIELD and guidance in FAA Advisory Circular 150/5335-5D (FAA 2022), which provides approximations based on general correlations, but are not specific to the analyzed aircraft.

Note the following when reviewing the ACR/PCR ratio:

- Green – structurally adequate: the ACR/PCR ratio is less than or equal to 1.0; the pavement section can support the maximum take-off weight (MTOW) of the selected aircraft without restrictions.
- Yellow – overload guidance applies: the ACR/PCR ratio is greater than 1.0 but less than 1.1; weight restrictions are recommended for certain aircraft in the traffic mix to avoid structural damage.
- Red – structurally inadequate: the ACR/PCR ratio is greater than 1.1; some aircraft in the current traffic mix should be limited from using the pavement section.

Table 4. PCR results and corresponding allowable aircraft weights.

Pavement Section	Allowable Gross Weight (S)	Allowable Gross Weight (D)	Allowable Gross Weight (2D)	Calculated PCR	Max ACR	Max ACR Aircraft	ACR/PCR Ratio
Runway 06-24, Section 01	120,000 lbs	223,000 lbs	329,000 lbs	610/F/C/X/T	550	Boeing Globemaster 3	0.90
Runway 06-24, Section 02	120,000 lbs	223,000 lbs	329,000 lbs	610/F/C/X/T	550	Boeing Globemaster 3	0.90
Runway 12-30, Section 01	54,000 lbs	66,000 lbs	123,000 lbs	180/R/C/W/T	164	Bombardier CRJ-200	0.91
Runway 12-30, Section 02	54,000 lbs	66,000 lbs	123,000 lbs	180/R/C/W/T	164	Bombardier CRJ-200	0.91
Runway 12-30, Section 03	54,000 lbs	66,000 lbs	123,000 lbs	180/R/C/W/T	164	Bombardier CRJ-200	0.91
Runway 12-30, Section 04	54,000 lbs	66,000 lbs	123,000 lbs	180/R/C/W/T	164	Bombardier CRJ-200	0.91

Table Notes:

1. See figure 3 in the Fort Dodge Regional Airport Pavement Management Report or refer to the interactive APMS tool for the location of the branch and section.
2. Corresponding allowable gross weights for Single (S), Dual (D), and Double Dual (2D) gears are determined using FAARFIELD and guidance in Appendix E of FAA Advisory Circular 150/5335-5D, which provides approximations based on general correlations but are not specific to the analyzed aircraft.
3. The recommended PCR for reporting to avoid overloading is limited to not exceed 10 percent of the maximum ACR for all sections presented in this table. If the fleet mix changes, the PCR should be recalculated.

Generally, a single PCR is published for a runway, and the structural capacity is often limited by the weakest area of the runway (as traffic, especially for heavier aircraft, often require the use of the entire length of the facility). As such, the recommendation provided herein for the value to publish for the runway PCR is based on the weakest area of the runway.

Runways 06/24 and 12/30 have sufficient structural capacity for the analyzed traffic. APTech recommends reporting a PCR of 610/F/C/X/T for Runway 06/24 and 180/R/C/W/T for Runway 12/30. It should be noted that the pavement capacity of both runways exceeds the demand of the current traffic as listed in table 3. As suggested in FAA Advisory Circular 150/5335-5D (FAA 2022), to avoid reporting PCRs that are excessively greater than the ACRs of the aircraft in the analyzed traffic mix, the PCR has been limited based on ACRs of the traffic using the facility. Both runways may be able to support heavier aircraft, but specific aircraft would have to be analyzed in the traffic mix to verify. Load-related distress in the form of alligator cracking was observed during the most recent PCI inspection on Runway 6/24 Section 02. Additionally, load-related distresses in the form of corner break, LTD cracking, and shattered slab were identified on Runway 12/30 Section 03 and in the form of LTD cracking on Runway 12/30 Section 04. These pavements should be monitored for future deterioration.

In general, aircraft with ACRs less than the PCR can operate unrestricted, and aircraft with ACRs greater than the PCRs for the analyzed facilities may be able to safely use these pavements by following the ACR-PCR procedure and operating at a reduced weight. Some infrequent overloads are allowed in accordance with the general overload guidance, which is presented within this report. Aircraft operators are required to obtain permission to use a runway when their aircraft's ACR exceeds the published PCR. These operators are often aware of their aircraft's ACR for their intended operating weight.

Additionally, pavement overloads are expected to decrease pavement life but do not often cause immediate or catastrophic failures unless they are excessive. While the FAA's pavement structural capacity approach is conservative, decision-makers should be aware of the effect and risks of operating these aircraft based on the PCR analysis results where overload operations are conducted.

Summary

APTech determined the PCRs for Runways 06/24 and 12/30 at Fort Dodge Regional Airport. The assessment included reviewing available pavement construction records and aircraft traffic data and subsequently analyzing these data to determine the pavement's structural capacity.

An overview of the ACR-PCR system, inputs used for PCR calculations (including pavement layer thicknesses, material types, subgrade modulus, and traffic), and PCR results are documented in this report. The PCRs presented within this report were calculated using the FAA's technical evaluation method for determining PCRs, as described in FAA Advisory Circular 150/5335-5D (FAA 2022) and using the corresponding FAARFIELD software.

The PCR recommended for publication for Runway 06/24 at Fort Dodge Regional Airport is 610/F/C/X/T and for Runway 12/30 is 180/R/C/W/T. The analysis indicates both runways are structurally adequate for the analyzed aircraft. Load-related distresses were observed during the most recent PCI inspection on Runway 6/24 Section 02 and on Runway 12/30 Sections 03 and 04. These pavements should be monitored for future deterioration.

References

Applied Pavement Technology, Inc. (APTech). 2022. "Fort Dodge Regional Airport Pavement Management Report." *2022 Iowa Airport Pavement Management System (APMS) Report*. Applied Pavement Technology, Inc., Urbana, IL.

Applied Pavement Technology, Inc. (APTech). 2023. "Iowa 2023 IDEA." Website. Iowa Department of Transportation, Modal Transportation Bureau – Aviation (Iowa DOT), Ames, IA.


ASTM International. 2020. "Standard Test Method for Airport Pavement Condition Index Surveys." *Annual Book of ASTM Standards*. ASTM Designation D5340-20. ASTM International, West Conshohocken, PA.

Federal Aviation Administration (FAA). 2005. *Standard Naming Convention for Aircraft Landing Gear Configurations. Order 5300.7*. U.S. Department of Transportation, Federal Aviation Administration, Washington, DC.

Federal Aviation Administration (FAA). 2022. *Standardized Method of Reporting Airport Pavement Strength - PCR*. Advisory Circular 150/5335-5D. U.S. Department of Transportation, Federal Aviation Administration, Washington, DC.

Federal Aviation Administration (FAA). 2023a. *FAARFIELD 2.1*. U.S. Department of Transportation, Federal Aviation Administration, Washington, DC.

Federal Aviation Administration (FAA). 2023b. "[Traffic Flow Management System Counts \(TFMSC\)](#)." Webpage. U.S. Department of Transportation, Federal Aviation Administration, Washington, DC.

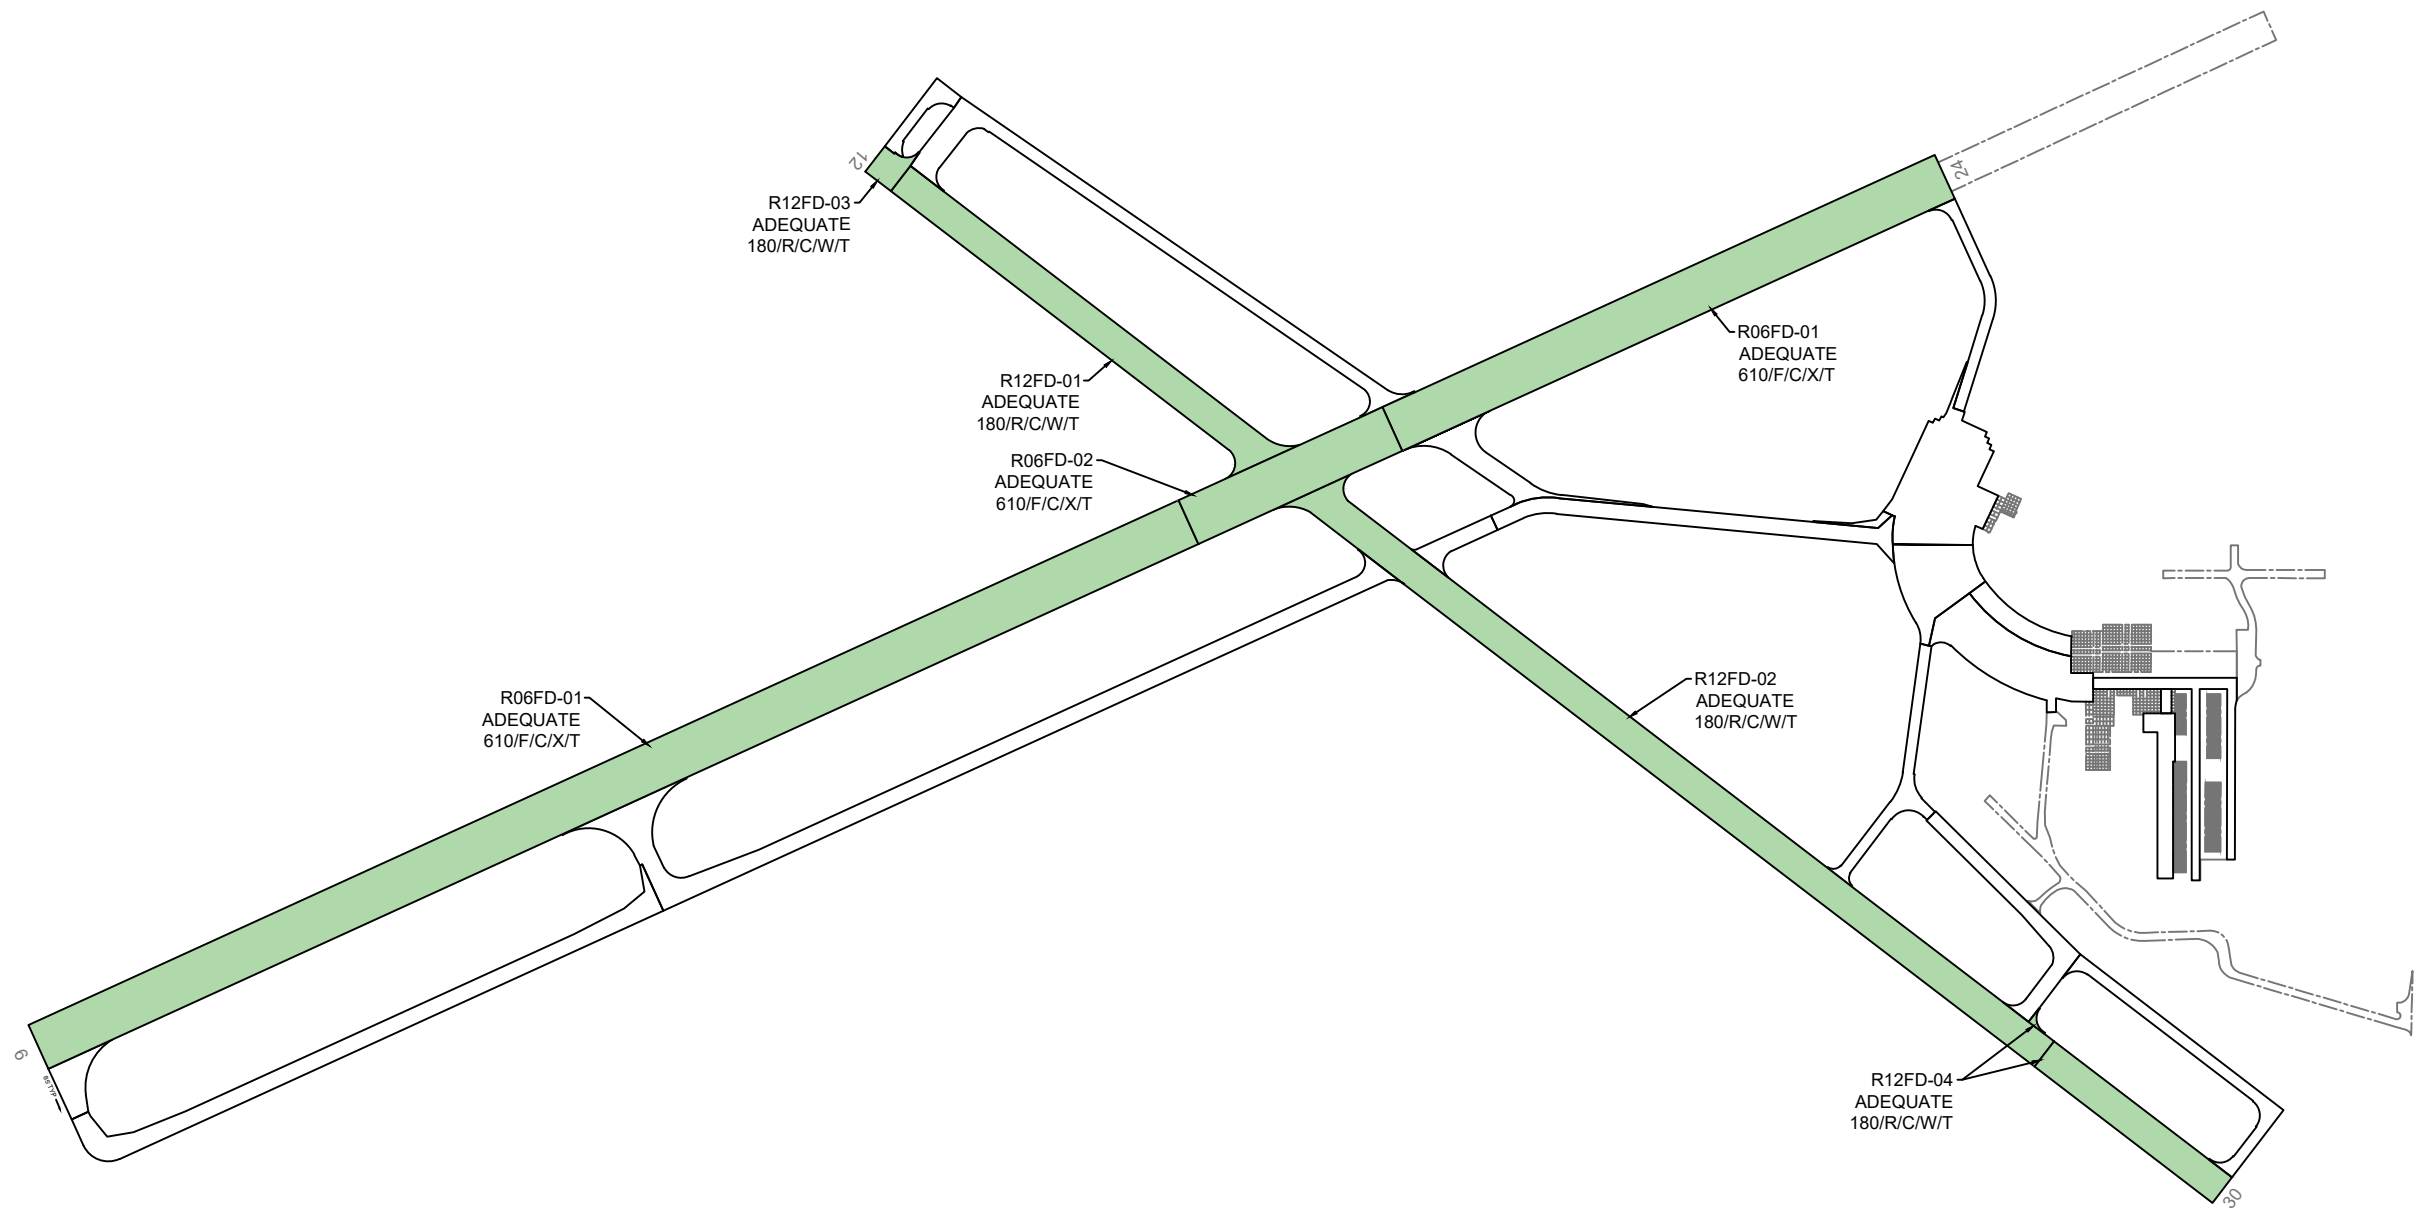

LEGEND

	BRANCH IDENTIFIER
	SECTION IDENTIFIER
	SECTION BREAK LINE

ACR/PCR RATIO

ADEQUATE		RATIO ≤ 1
OVERLOAD GUIDANCE		1 < RATIO < 1.1
INADEQUATE		RATIO ≥ 1.1

applied pavement TECHNOLOGY
 115 W. Main Street, Suite 400
 Urbana, IL 61801
 Tel: 217-398-3977
 Fax: 217-398-4027

AGENCY: Iowa Department of Transportation			
MODAL TRANSPORTATION BUREAU			
LOCATION: Fort Dodge Regional Airport			
Fort Dodge, Iowa			
PAGE TITLE: PCR Map			
PROJECT DATE: OCT. 2023	CREATION DATE: APR. 2024	PROJECT MANAGER: LJR	JOB NUMBER: 2021-125-AM02
DRAWING SCALE: 1"=600'	LAST MODIFIED DATE: APR. 2024	REVISED BY: KEW	DRAWN BY: KEW
FILENAME: Fort Dodge.dwg	LAYOUT NAME/NUMBER: PCR	PAGE NUMBER: Figure 1	



PREPARED FOR

Iowa Department of Transportation
Modal Transportation Bureau – Aviation
800 Lincoln Way
Ames, Iowa 50010
515-239-1691
<https://iowadot.gov/aviation>

JULY 2024