



Steel Beam Guardrail Tangent End Terminal (50'-9 $\frac{1}{2}$ "  
or  
Steel Beam Guardrail Flared End Terminal  
for Cable Connection (40'-7 $\frac{1}{2}$ "

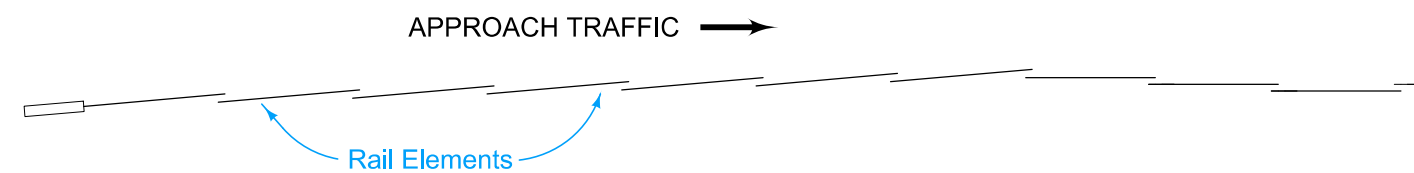

LAPPING PROCEDURE

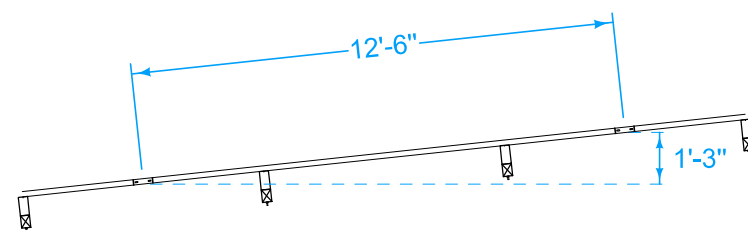

VARIABLE FLARE

Install delineators and object markers according to SI-211.

For grading requirements, see EW-301.

For general guardrail details, see BA-200.

① See BA-203.

② See BA-205.

③ See BA-206.

Possible Contract Items:

- Steel Beam Guardrail
- Steel Beam Guardrail End Anchor, W-Beam
- Steel Beam Guardrail Flared End Terminal, BA-206
- Steel Beam Guardrail Tangent End Terminal, BA-205

Possible Tabulation:  
108-8C

	REVISION	
	7	04-20-21
<b>STANDARD ROAD PLAN</b>		<b>BA-252</b>
REVISIONS: Removed Interim from standard.		SHEET 1 of 1
 APPROVED BY DESIGN METHODS ENGINEER		
<b>STEEL BEAM GUARDRAIL INSTALLATION AT SIDE OBJECT (ONE-WAY PROTECTION)</b>		