DESIGNER INFO

8101
04-21-15

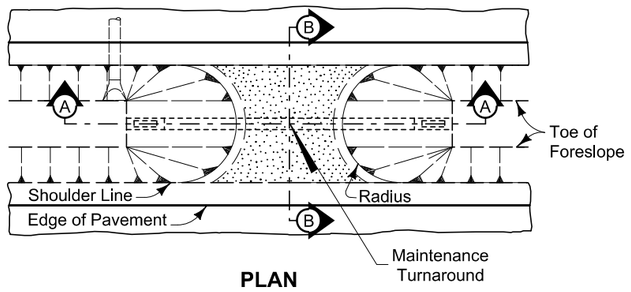

PLAN

1. Surfacing quantities based on a 6 inch layer of Macadam Stone base and a 4 inch layer of Class 'A' Road Stone. Apply surfacing as directed by the Engineer.
2. Construct 8:1 foreslope when drainage pipe is incorporated into the maintenance turnaround.
3. Install Polymer Grid between Class 10 and stone material.
4. See Standard Road Plan DR-212.

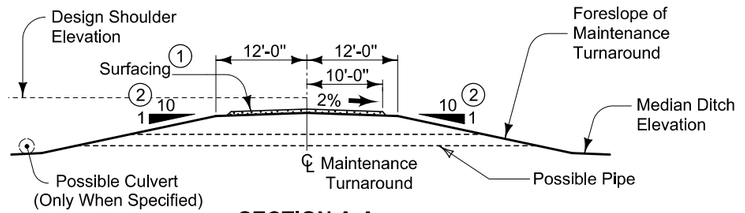

SECTION A-A

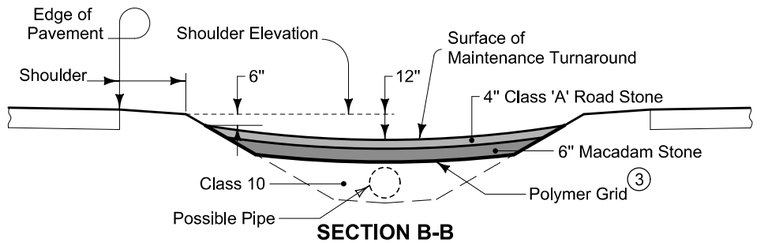

SECTION B-B

MAINTENANCE TURNAROUND

Location		Class 'A' Road Stone	Macadam Stone	Polymer Grid	Class 10	Pipe Length	Beveled Pipe & Guard (4)	Radius	Remarks
Road Identification	Station	TONS	TONS	SY	CY	LF	EACH	FT	