


Hot Mix Asphalt
Widening on Existing
Pavement Without Curb

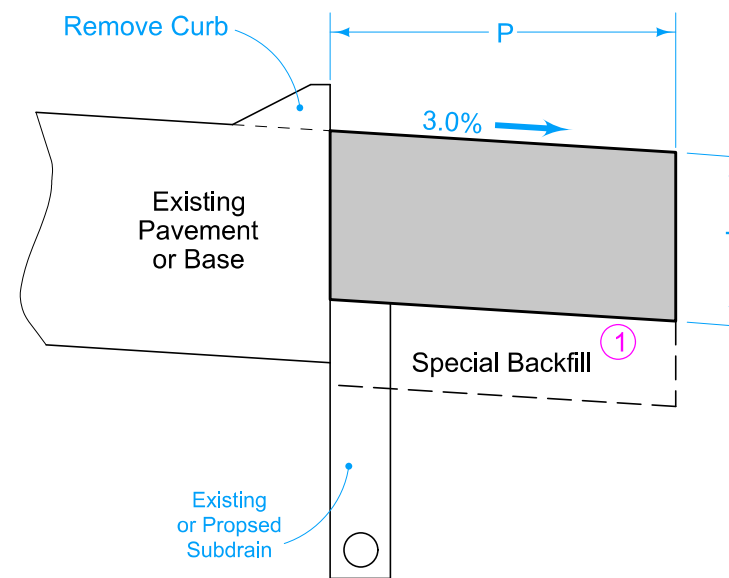

Hot Mix Asphalt
Widening on Existing
Pavement With Curb

'P' and 'T' are specified by the individual project plans. Dimensions may vary for superelevated curves or at locations specifically designated by the Engineer.

Handle excavated asphalt materials as detailed elsewhere in the project plans.

Construct special shaping of widening units through bridge approach sections as directed by the Engineer.



Excavation in excess of that indicated is incidental to other work on the project.

Place Special Backfill only at locations where specifically required by the Engineer. This work will be paid for as "Extra Work" as per Article 1109.03 of the Standard Specifications.

① 6 inches of Special Backfill required when widening unit is part of the proposed traffic lane or when noted in project plans.

Possible Contract Items:
 Base Widening, Hot Mix Asphalt Mixture
 Removal of Curb
 Removal of Flumes
 Excavation, Class 13, For Widening
 Special Backfill
 Asphalt Binder

Possible Tabulations:
 106-5
 110-4
 110-3

 STANDARD ROAD PLAN	REVISION	
	1	04-21-20
PV-203		SHEET 1 of 1
REVISIONS: New logo.		
 <small>APPROVED BY DESIGN METHODS ENGINEER</small>		
HMA BASE WIDENING		