




W4-2M;  
48.00" across sides 3.00" Radius, 1.25" Border, 0.75" Indent, Black on Orange;  
[MERGE] C 2K;  
Standard Arrow Custom 29.25" X 13.50" 180;

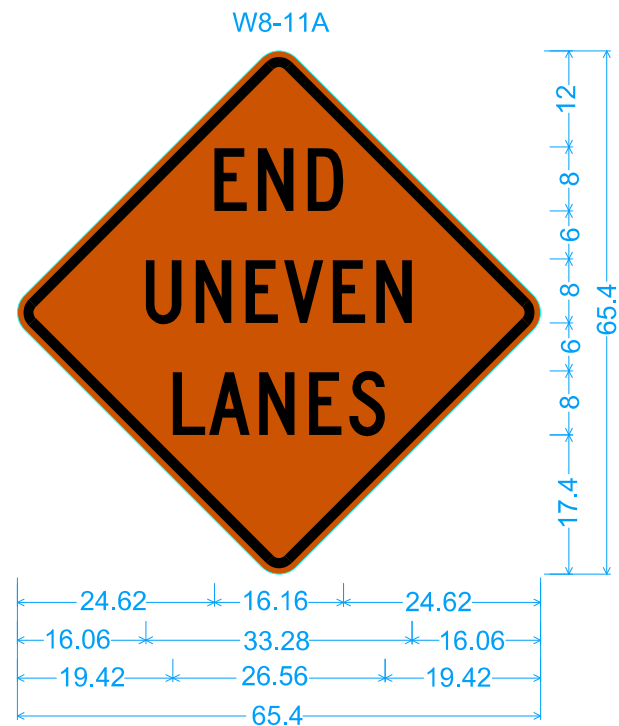


W8-11A;  
48.00" across sides 3.00" Radius, 1.25" Border, 0.75" Indent, Black on Orange;  
[END] C 2K; [UNEVEN] C 2K; [LANES] C 2K;

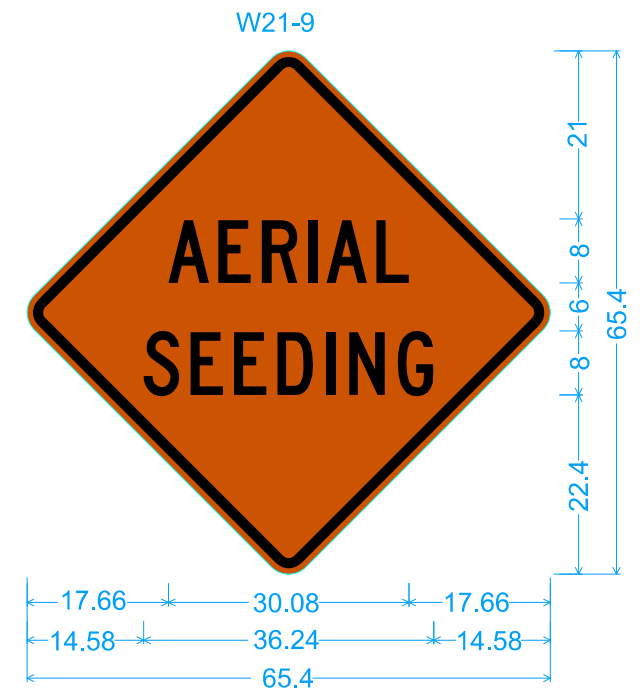

W21-9;  
48.00" across sides 3.00" Radius, 1.25" Border, 0.75" Indent, Black on Orange;  
[AERIAL] C 2K; [SEEDING] C 2K;

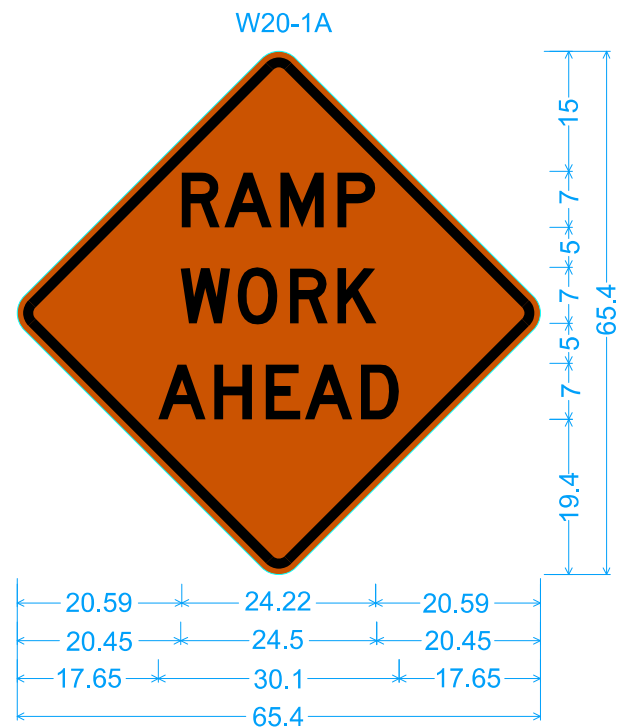

W20-1A;  
48.00" across sides 3.00" Radius, 1.25" Border, 0.75" Indent, Black on Orange;  
[RAMP] D 2K; [WORK] D 2K; [AHEAD] D 2K;

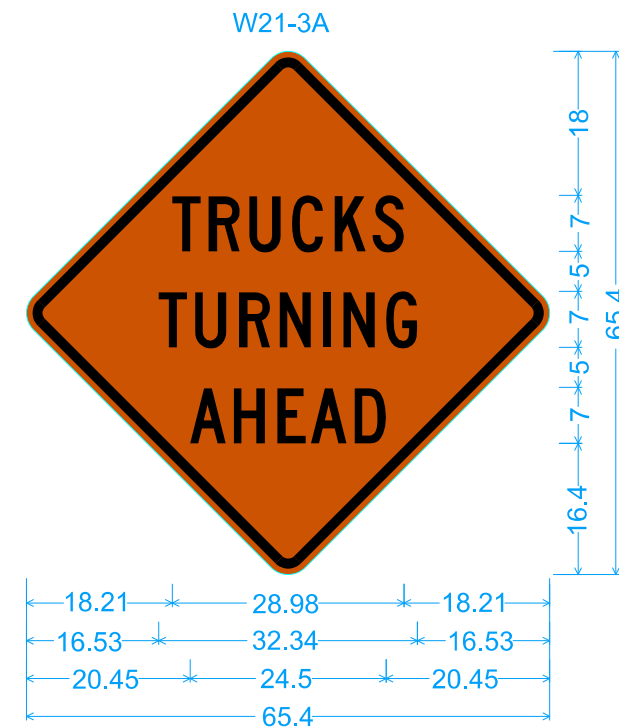


W20-1A;  
48.00" across sides 3.00" Radius, 1.25" Border, 0.75" Indent, Black on Orange;  
[TRUCKS] C 2K; [TURNING] C 2K;  
[AHEAD] C 2K;


	REVISION	
	6	04-16-19
	<b>SI-881</b>	
STANDARD ROAD PLAN		
SHEET 1 of 4		
REVISIONS: Added WORK ZONE sign to page 4.		
 APPROVED BY DESIGN METHODS ENGINEER		
<b>SPECIAL SIGNS FOR WORKZONES</b>		




G20-22  
2.25" Radius, 0.88" Border, 0.63" Indent, Black on Orange;  
[EXIT] E 2K; [500 FT] E 2K;

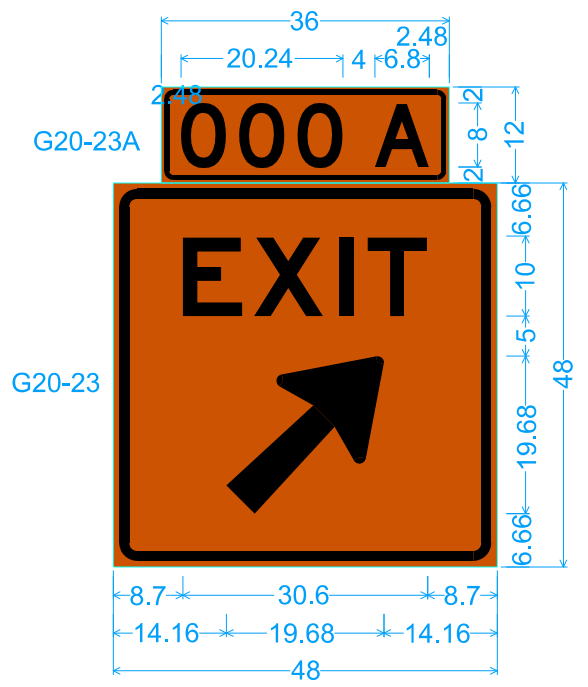


G20-23A;  
0.63" Border, 0.38" Indent, Black on Orange;  
[000 A] D 2K;  
G20-23;  
1.25" Border, 0.75" Indent, Black on Orange;  
[EXIT] E 2K; Arrow 80 - 25.00" 45°;

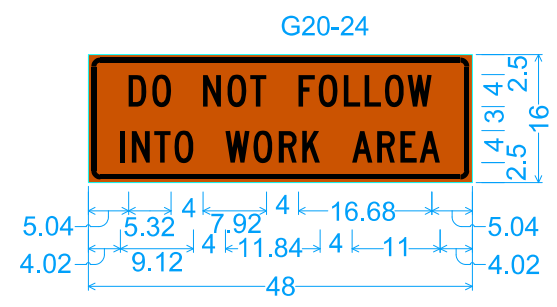


G20-24  
1.50" Radius, 0.63" Border, 0.38" Indent, Black on Orange;  
[DO NOT FOLLOW] C 2K;  
[INTO WORK AREA] C 2K;

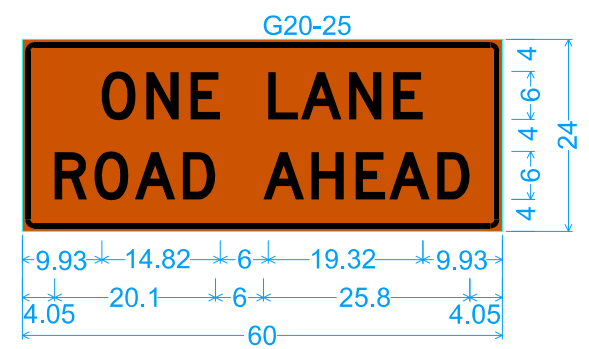

G20-25  
1.50" Radius, 0.63" Border, 0.38" Indent, Black on Orange;  
[ONE LANE] D 2K; [ROAD AHEAD] D 2K;

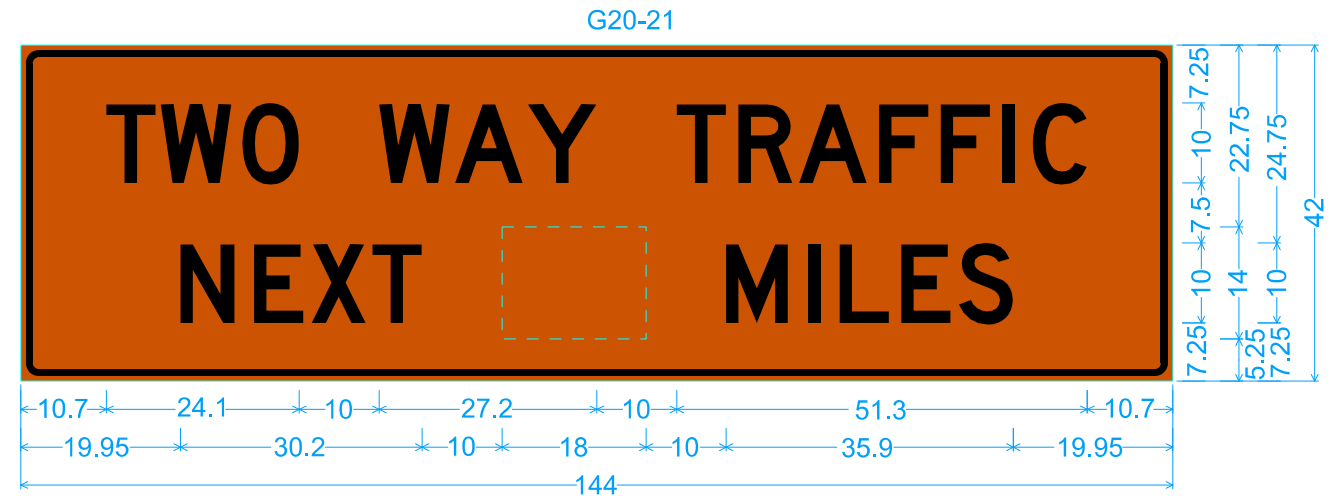

G20-21  
2.25" Radius, 0.88" Border, 0.63" Indent, Black on Orange;  
[TWO WAY TRAFFIC] D 2K; [NEXT] D 2K; G20-21A; [MILES] D 2K;




G20-21A;  
No border, Black on Orange;  
[00] D 2K;


 <b>STANDARD ROAD PLAN</b>	REVISION	
	6	04-16-19
	<b>SI-881</b>	
SHEET 2 of 4		
REVISIONS: Added WORK ZONE sign to page 4.		
 APPROVED BY DESIGN METHODS ENGINEER		
<b>SPECIAL SIGNS FOR WORKZONES</b>		




3.00" Radius, 1.25" Border, 0.75" Indent, Black on Orange;  
 [WET] E 2K; [YELLOW] E 2K;  
 [PAINT] E 2K;

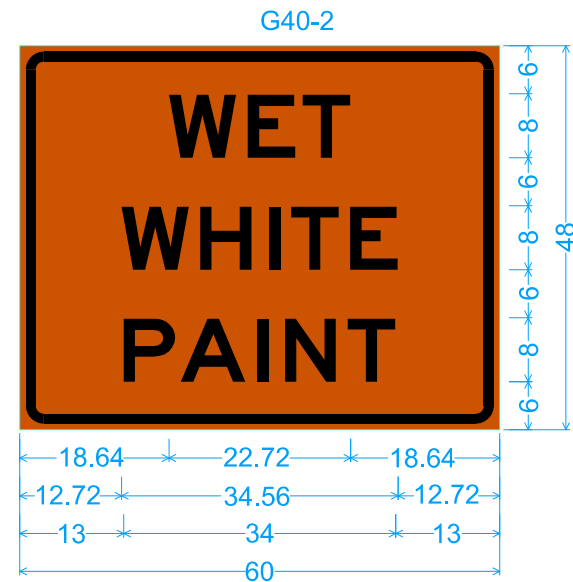


3.00" Radius, 1.25" Border, 0.75" Indent, Black on Orange;  
 [WET] E 2K; [WHITE] E 2K; [PAINT] E 2K;

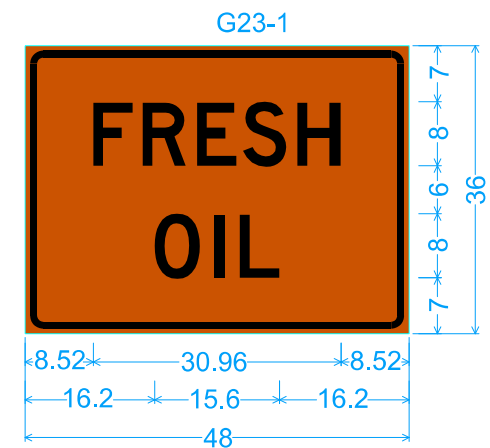

2.25" Radius, 0.88" Border, 0.63" Indent, Black on Orange;  
 [FRESH] D 2K specified length;  
 [OIL] D 2K specified length;

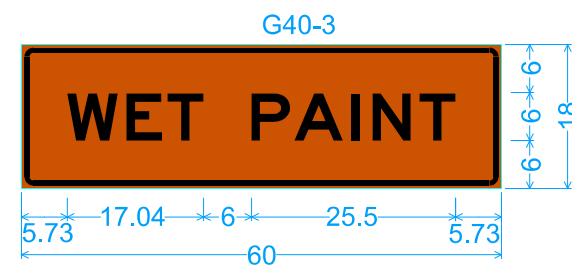

1.50" Radius, 0.63" Border, 0.38" Indent, Black on Orange;  
 [WET PAINT] E 2K;

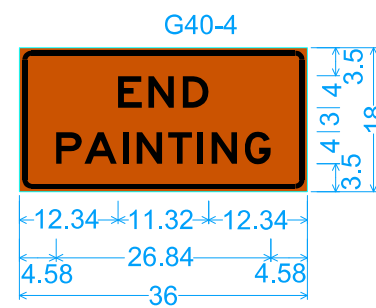


1.50" Radius, 0.63" Border, 0.38" Indent, Black on Orange;  
 [END] E 2K;  
 [PAINTING] E 2K;




1.50" Radius, 0.63" Border, 0.38" Indent, Black on Orange;  
 [FRESH OIL] C 2K;

	REVISION	
	6	04-16-19
<b>STANDARD ROAD PLAN</b>		<b>SI-881</b>
		SHEET 3 of 4
REVISIONS: Added WORK ZONE sign to page 4.		
APPROVED BY DESIGN METHODS ENGINEER		
<b>SPECIAL SIGNS FOR WORKZONES</b>		

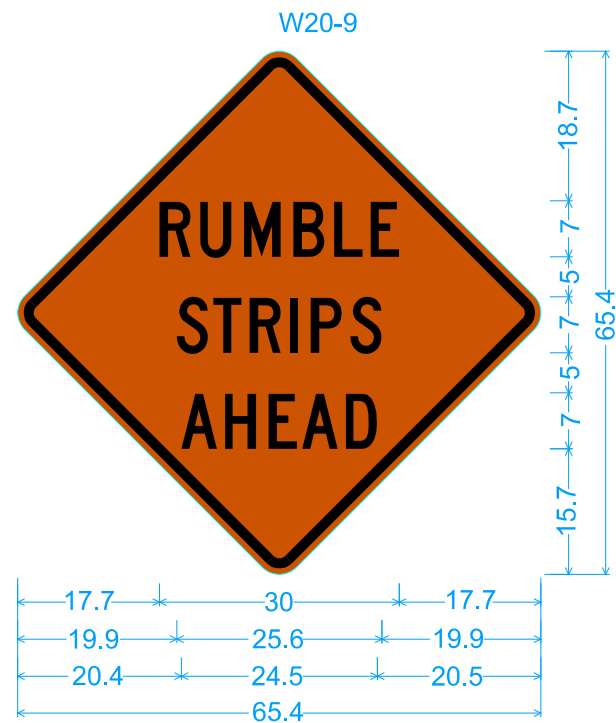

W20-9;  
 48.0" across sides 3.0" Radius, 1.3" Border, 0.8" Indent, Black on Orange;  
 [RUMBLE] C 2K; [STRIPS] C 2K; [AHEAD] C 2K;

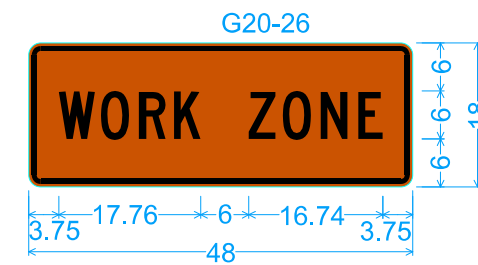

1.50" Radius, 0.63" Border, 0.38" Indent, Black on Orange;  
 [WORK ZONE] C 2K;

	REVISION	
	6	04-16-19
<b>STANDARD ROAD PLAN</b>		<b>SI-881</b>
		SHEET 4 of 4
REVISIONS: Added WORK ZONE sign to page 4.		
APPROVED BY DESIGN METHODS ENGINEER		
<b>SPECIAL SIGNS FOR WORKZONES</b>		